



MODERN LIVING,
TRADITIONAL HEATING.

Ember

www.ember.de



COLLECTION

Contemporary models bring warmth to any space, making your house feel like a true home.

Table of contents

About us	04
Advantage	05
Traditional craftsmanship	06
Modern technology	07

Classic range	08 - 09
E-Basic	10 - 11
E11	12 - 13
E14	14 - 15
E16	16 - 17

Modern line	18 - 19
E11 FG	20 - 21
E14 FG	22 - 23
E16 FG	24 - 25
E15 FG	26 - 27
E15 XL FG	28 - 29
D19 FG	30 - 31
F11 FG	32 - 33
F14 FG	34 - 35
F16 FG	36 - 37

50 range	38 - 39
O1	40 - 41
O1 XL	42 - 43
O2	44 - 45
M3 FG	46 - 47
M4 FG	48 - 49

Kitchen range	50 - 51
Cook	52 - 53
A1-80	54 - 55
A2-40	56 - 57

Design and environment	58 - 59
Combustion efficiency	60 - 61
Production	62 - 63
Technical informations	64 - 69
Notes	70 - 71

ABOUT US

EMBER KAMIN

EMBER KAMIN



Ember Kamin wood-burning stoves represent premium offerings exclusively available through authorized distributors. Our distribution network extends across Europe, reflecting our commitment to delivering excellence across the continent.

At Ember Kamin, our guiding philosophy revolves around achieving complete customer satisfaction. We pride ourselves on having a team of top-tier professionals who harness cutting-edge technologies to ensure the delivery of products of unparalleled quality to our discerning clientele.



OPTIMUM
PERFORMANCE




CLEAN
ENERGY



SAFE
HANDLING



CLEAN GLASS
SYSTEM

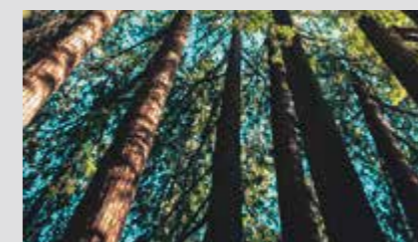

ADVANTAGE

When you choose an Ember Kamin wood stove, you're not just adding value to your home; you're creating a cozy and welcoming atmosphere. Using Ember Kamin stoves is both easy and safe, ensuring comfort and peace of mind. Our stoves aren't just technologically impressive; they're also a sight to behold, adding a touch of elegance to your space.

TRADITIONAL CRAFTSMANSHIP


Ember Kamin brings together the latest technology, traditional craftsmanship, and skilled handwork. This unique combination enables us to produce high-end products of the finest quality.

EMBER KAMIN

MODERN TECHNOLOGY

EMBER KAMIN

The ongoing growth of our company aligns with our relentless pursuit of enhancing our production and manufacturing procedures. Our unwavering dedication is evident in our investments in cutting-edge technology and the continuous training and development of our workforce.

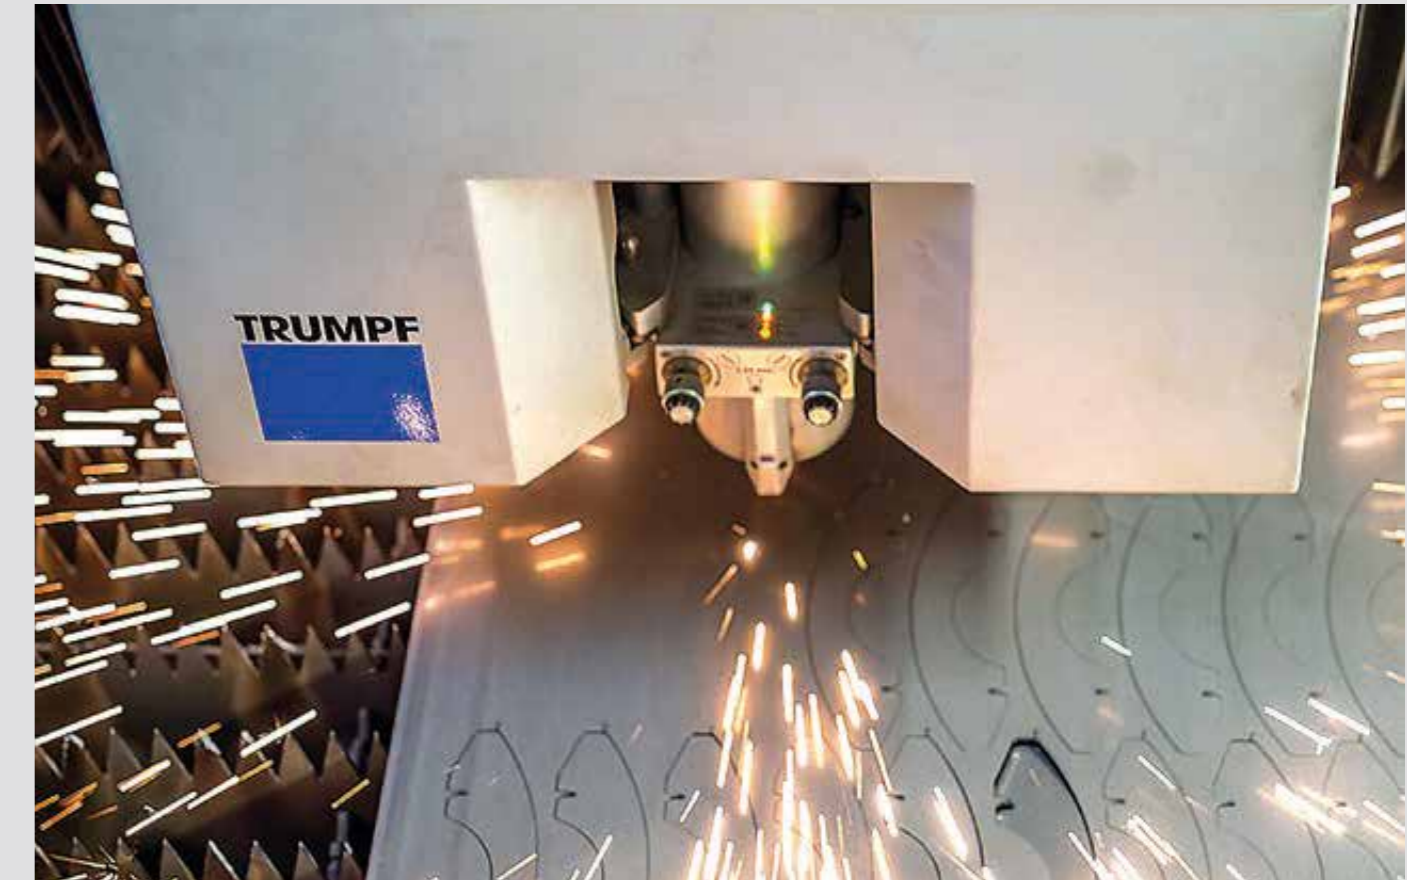



EMBER KAMIN

CLASSIC RANGE


Beauty in authenticity

- FIRE-RESISTANT CONCRETE LINING WITHIN THE COMBUSTION CHAMBER
- STEEL DOOR
- THREE POINTS DOOR CLOSING SYSTEM




EMBER KAMIN

E-BASIC

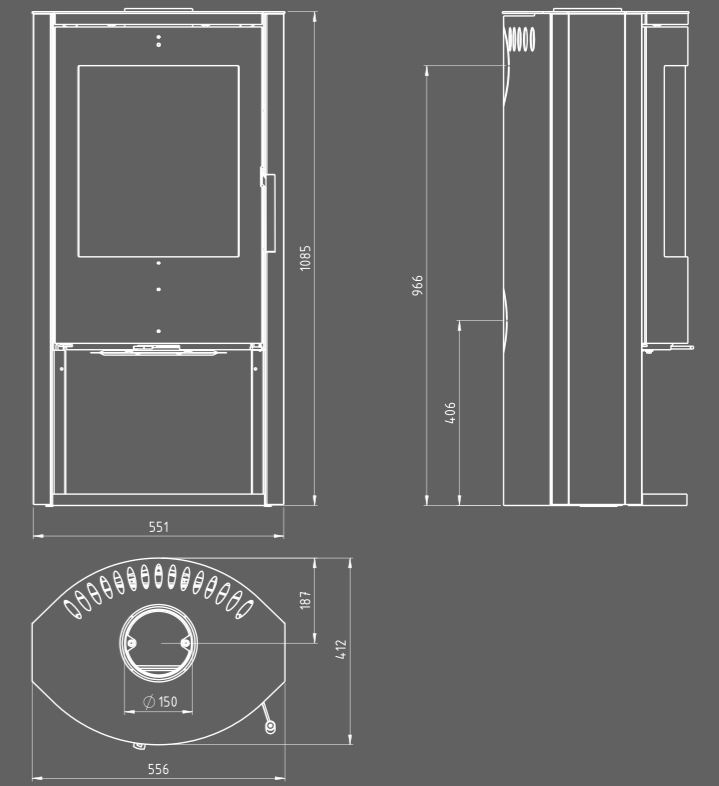

NOMINAL HEAT OUTPUT	6,0 kw
LIVING SPACE HEATING	125 m³
WEIGHT	119 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	10, 10, 80
EFFICIENCY	81%
FINE DUST	26mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A+

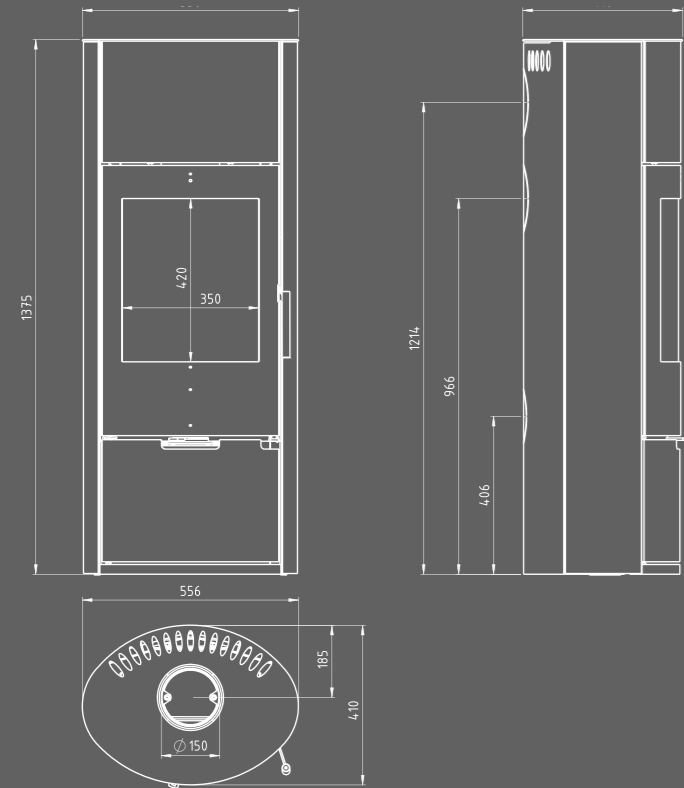

NOMINAL HEAT OUTPUT	6,0 kw
LIVING SPACE HEATING	125 m³
WEIGHT	130 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	10, 10, 80
EFFICIENCY	81%
FINE DUST	26 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A+



EMBER KAMIN

E11



Also available in versions:



serpentino



limestone

Heat accumulator installation option (40 kg)





EMBER KAMIN

E14




Also available in versions:




serpentino



limestone

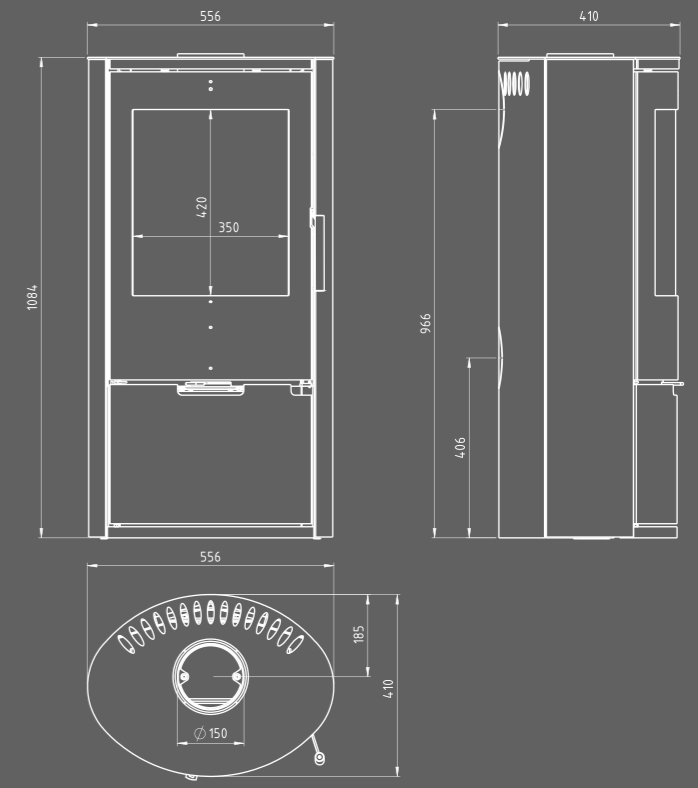

NOMINAL HEAT OUTPUT	6,0 kw
LIVING SPACE HEATING	125 m³
WEIGHT	119 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	10, 10, 80
EFFICIENCY	81%
FINE DUST	26mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A+

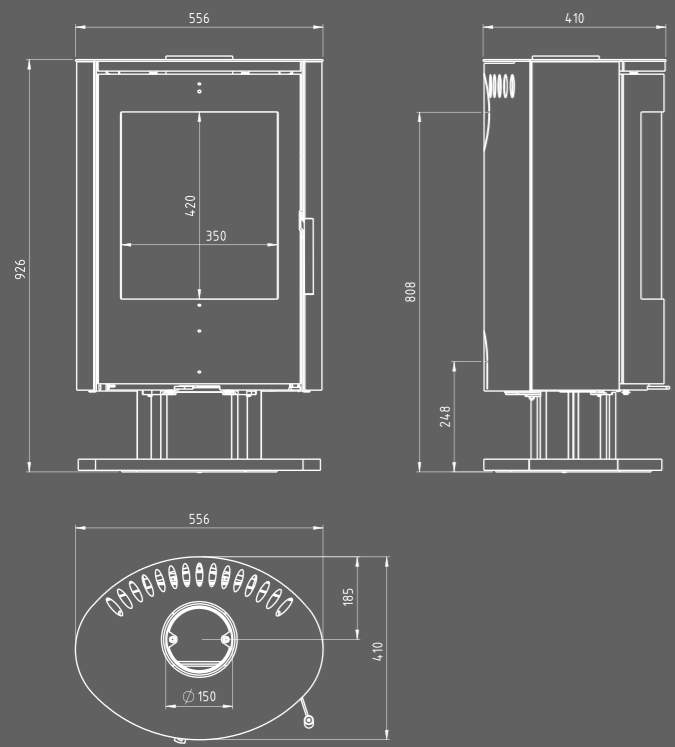


NOMINAL HEAT OUTPUT	6,0 kw
LIVING SPACE HEATING	125 m³
WEIGHT	112 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	10, 10, 80
EFFICIENCY	81%
FINE DUST	26 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A+



EMBER KAMIN

E16



The rotating feature of the fireplace enables you to customize your view of the fire at any moment, ensuring that the captivating flames are visible from various angles within your home.

Also available in versions:



serpentino limestone white ceramics black ceramics





EMBER KAMIN

MODERN RANGE

Supporting your lifestyle

- SCREEN PRINTED GLASS DOOR
- FULL HEIGHT HANDLE
- FIRE-RESISTANT CONCRETE LINING WITHIN THE COMBUSTION CHAMBER
- 8mm THICK METAL TOP PLATE
- CAST IRON COLLAR FOR SMOKE EVACUATION



EMBER KAMIN

E11 FG



Also available in versions:




serpentino




limestone

Heat accumulator installation option (40 kg)
See page 62 for more information.

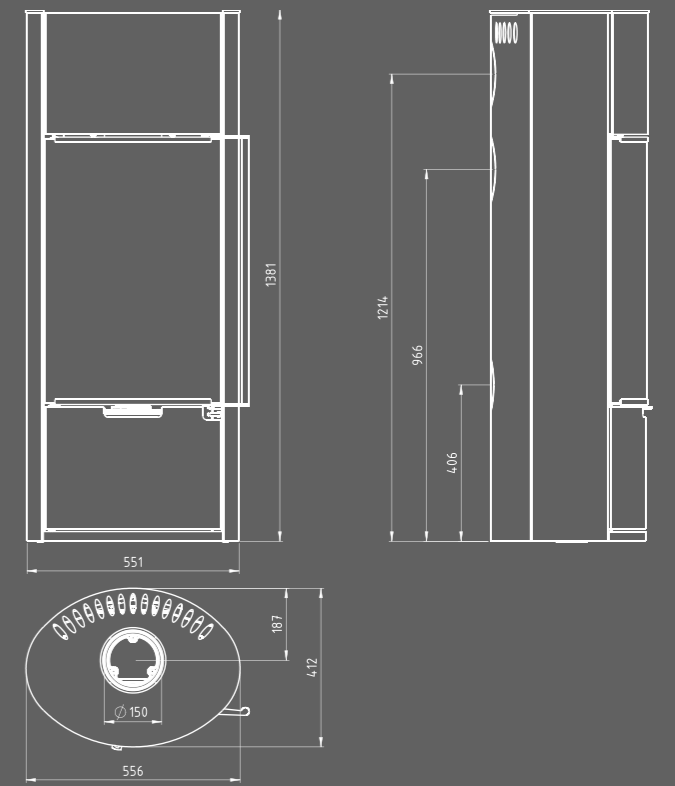

NOMINAL HEAT OUTPUT	6,0 kw
LIVING SPACE HEATING	125 m ³
WEIGHT	130 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	10, 10, 80
EFFICIENCY	81%
FINE DUST	26mg/m ³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A+

Heat accumulator installation option (40 kg)

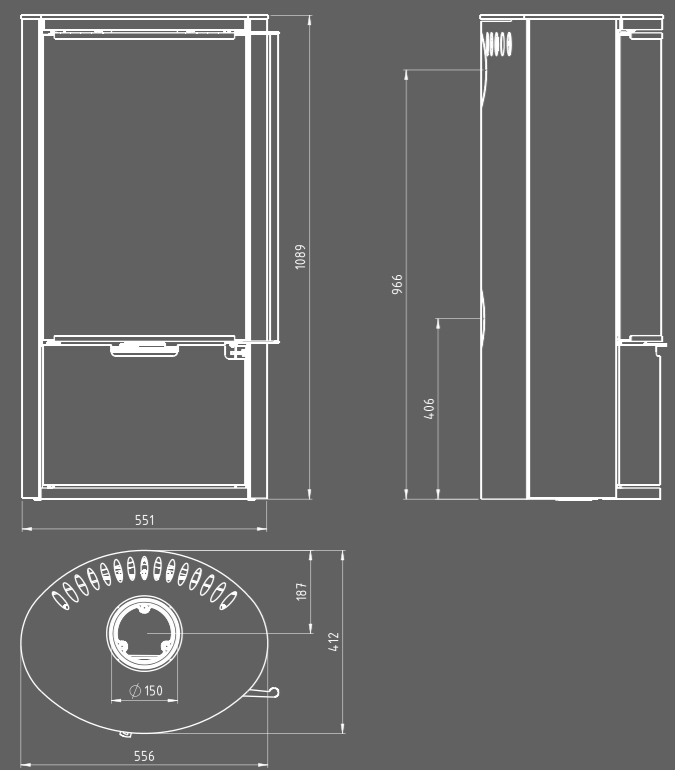

NOMINAL HEAT OUTPUT	6,0 kw
LIVING SPACE HEATING	125 m³
WEIGHT	119 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	10, 10, 80
EFFICIENCY	81%
FINE DUST	26 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø

-  ECO DESIGN
-  THE FRESH AIR CONNECTION
-  33cm
-  5 YEAR WARRANTY



EMBER KAMIN

E14 FG



Also available in versions:



serpentino



limestone

See page 62 for more information.





EMBER KAMIN

E16 FG




Also available in versions:




serpentino limestone red ceramics
white ceramics black ceramics

See page 62 for more information.

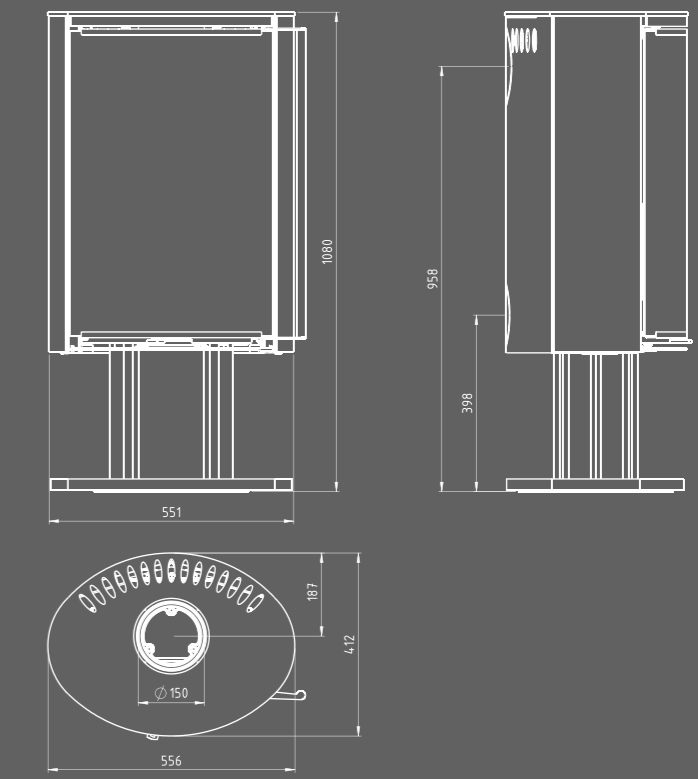

NOMINAL HEAT OUTPUT	6,0 kw
LIVING SPACE HEATING	125 m³
WEIGHT	115 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	10, 10, 80
EFFICIENCY	81%
FINE DUST	26 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	

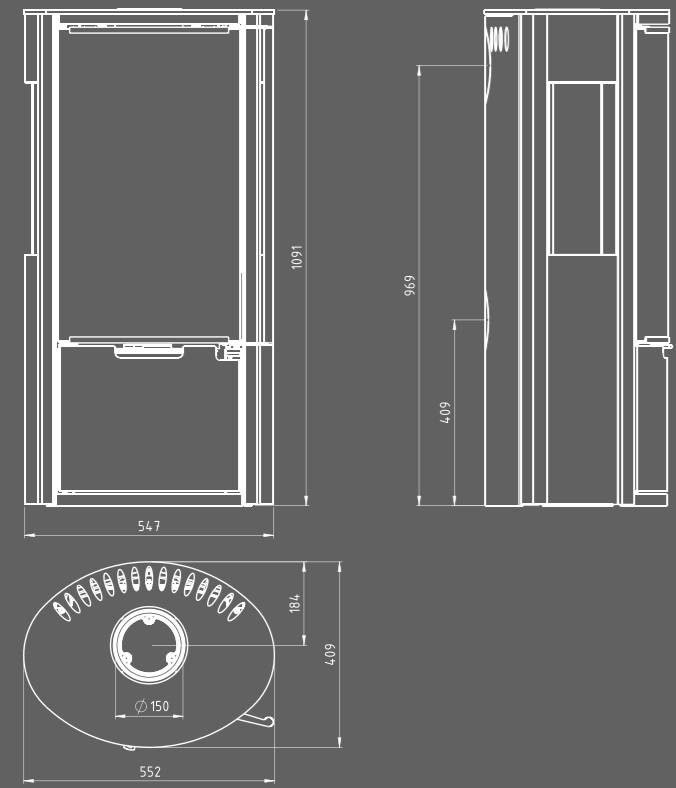

NOMINAL HEAT OUTPUT	6,0 kw
LIVING SPACE HEATING	125 m³
WEIGHT	116 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	13, 70, 80
EFFICIENCY	80%
FINE DUST	23 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A

ECO DESIGN 2022
 THE FRESH AIR CONNECTION
 33cm
 5 YEAR WARRANTY

EMBER KAMIN

E15 FG



Enjoy a clear view of the fire from every corner of your room
 The sophisticated handle seamlessly integrates with the fireplace's design, ensuring it doesn't hinder the view of the fire





EMBER KAMIN


E15 XL FG




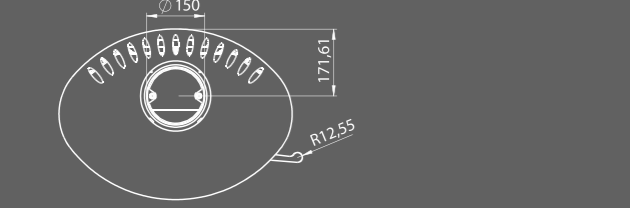
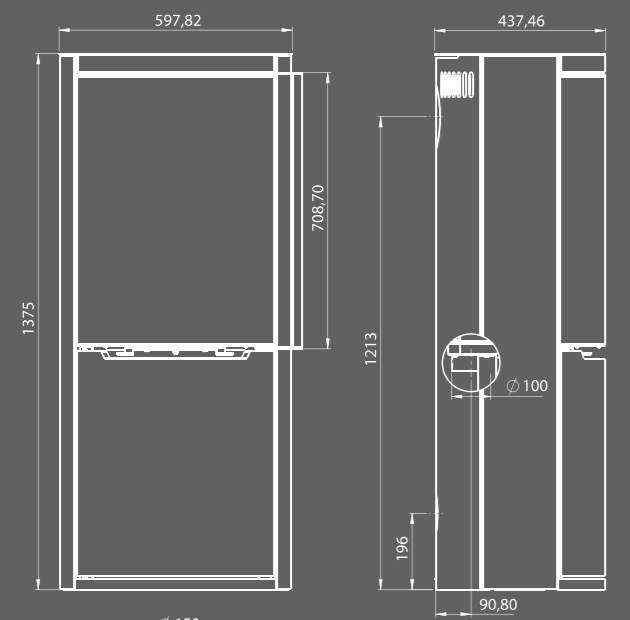
Heat accumulator installation option (40 kg)



Enjoy a clear view of the fire from every corner of your room
 The sophisticated handle seamlessly integrates with the fireplace's design,
 ensuring it doesn't hinder the view of the fire

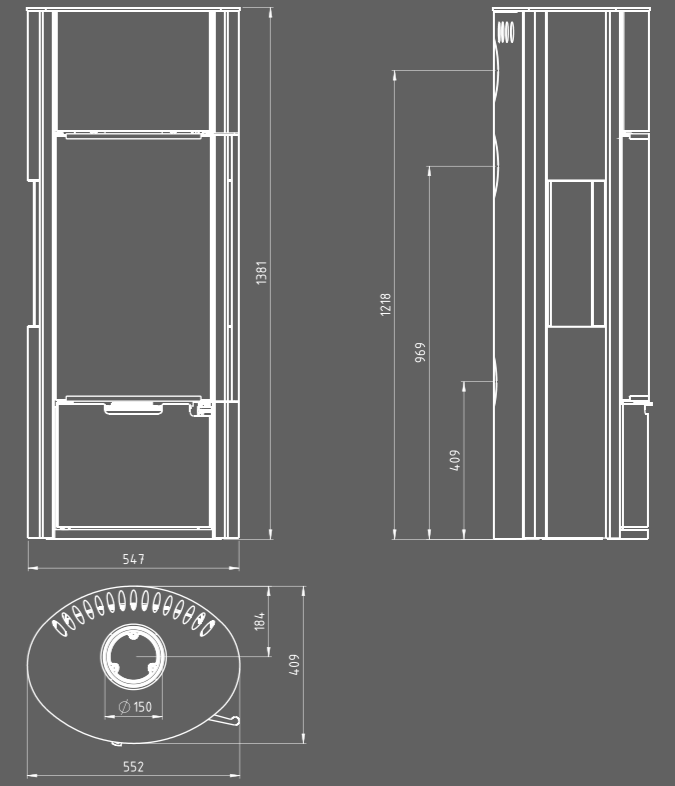

NOMINAL HEAT OUTPUT	6,0 kw
LIVING SPACE HEATING	125 m ³
WEIGHT	121 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	13, 70, 80
EFFICIENCY	80%
FINE DUST	23 mg/m ³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	



NOMINAL HEAT OUTPUT	6,6 kw
LIVING SPACE HEATING	125 m³
WEIGHT	152 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	18, 42, 115
EFFICIENCY	80%
FINE DUST	22 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A



EMBER KAMIN

D19 FG



Also available in versions:



serpentino



limestone





EMBER KAMIN

F11 FG




Heat accumulator installation option (65 kg)




The exceptionally spacious combustion chamber and the expansive glass provide an unobstructed view of the fire, enhancing the impressive presence of this fireplace.

The tasteful handle seamlessly integrates into the fireplace's design, ensuring it doesn't disrupt the view of the fire while adding to its overall elegance.

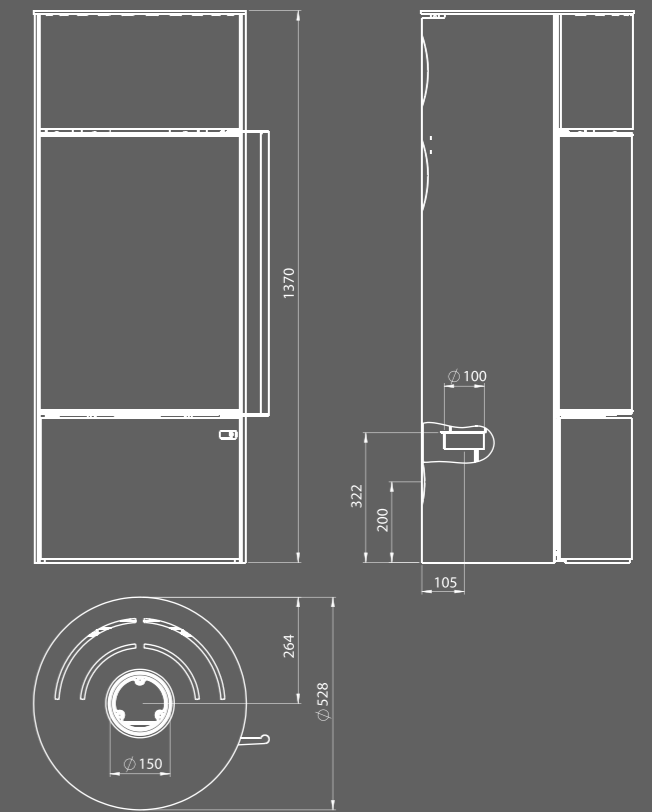

NOMINAL HEAT OUTPUT	7,0 kw
LIVING SPACE HEATING	125 m³
WEIGHT	154 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	18, 52, 115
EFFICIENCY	82%
FINE DUST	26 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A+

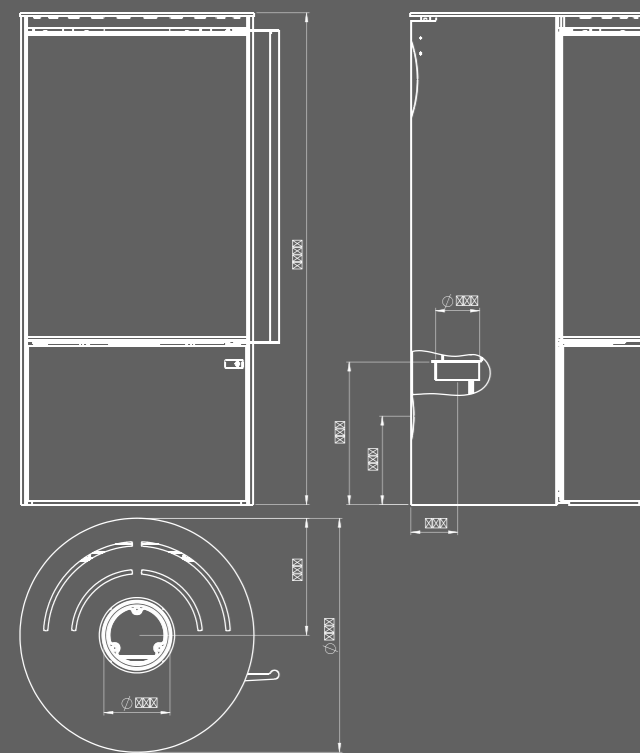

NOMINAL HEAT OUTPUT	7,0 kw
LIVING SPACE HEATING	125 m³
WEIGHT	144 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	18, 52, 115
EFFICIENCY	82%
FINE DUST	26 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A+



EMBER KAMIN

F14 FG



The exceptionally spacious combustion chamber and expansive glass frontage guarantee an impeccable view of the fire, presenting this fireplace with a commanding and striking presence.

The sophisticated handle seamlessly integrates with fireplace's design, ensuring it doesn't hinder the view of the fire.





EMBER KAMIN


F16 FG

The rotating feature of the fireplace enables you to customize your view of the fire at any moment, ensuring that the captivating flames are visible from various angles within your home.



The exceptionally spacious combustion chamber and expansive glass frontage guarantee an impeccable view of the fire, presenting this fireplace with a commanding and striking presence.

The sophisticated handle seamlessly integrates with fireplace's design, ensuring it doesn't hinder the view of the fire.

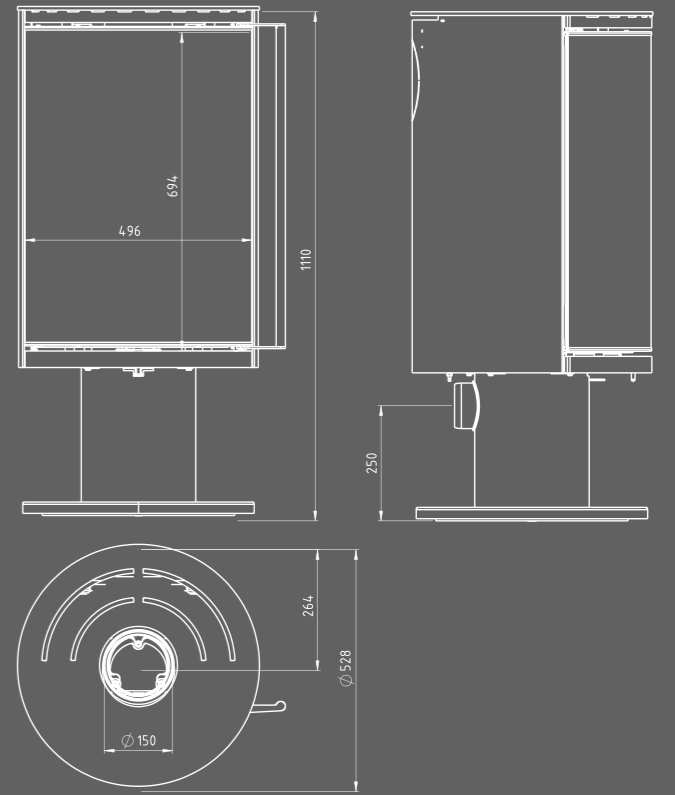

NOMINAL HEAT OUTPUT	7,0 kw
LIVING SPACE HEATING	125 m ³
WEIGHT	146 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	18, 52, 115
EFFICIENCY	82%
FINE DUST	26 mg/m ³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A+





EMBER KAMIN

50 RANGE

Higher heating capacity

- STOVE FOR 50 CENTIMETER LOGS
- FULL HEIGHT HANDLE
- FIRE-RESISTANT CONCRETE LINING WITHIN THE COMBUSTION CHAMBER

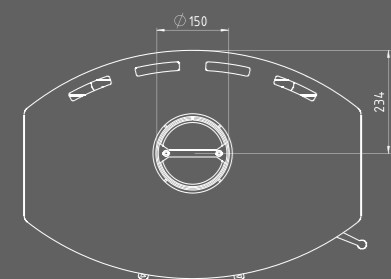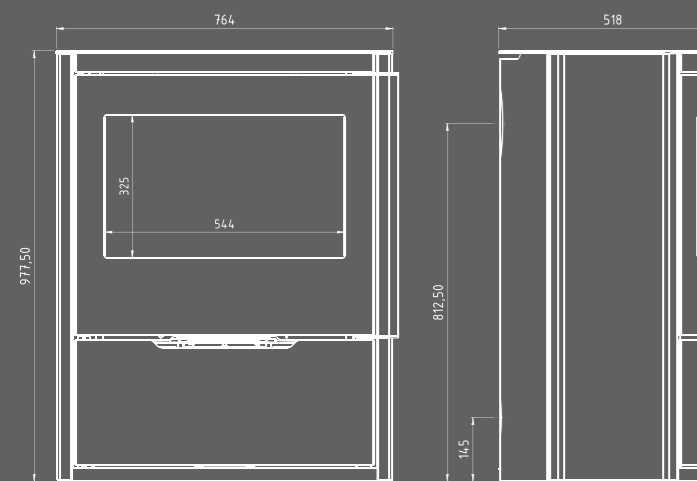

NOMINAL HEAT OUTPUT	7,6 kw
LIVING SPACE HEATING	145 m³
WEIGHT	172 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	10, 45, 127
EFFICIENCY	76%
FINE DUST	18 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	



EMBER KAMIN

01



Also available in versions:



serpentino



limestone





EMBER KAMIN

01 XL





Also available in versions:




serpentino



limestone

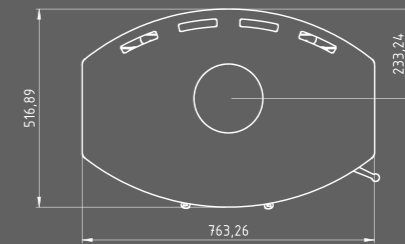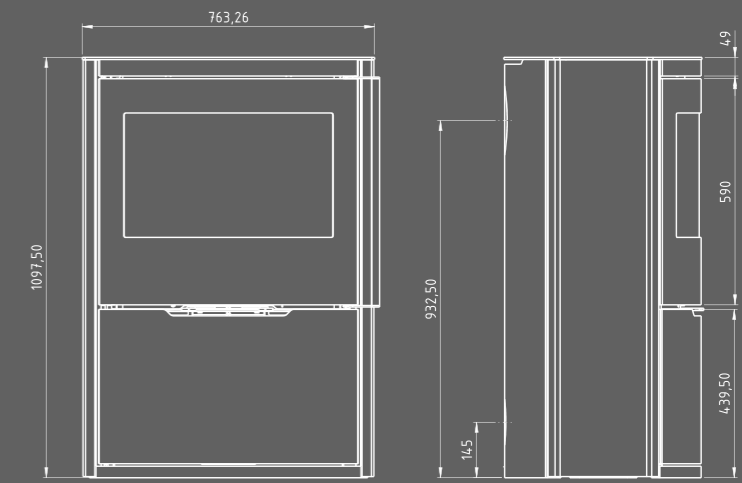

NOMINAL HEAT OUTPUT	7,6 kw
LIVING SPACE HEATING	145 m³
WEIGHT	182 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	10, 45, 127
EFFICIENCY	76%
FINE DUST	18 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A

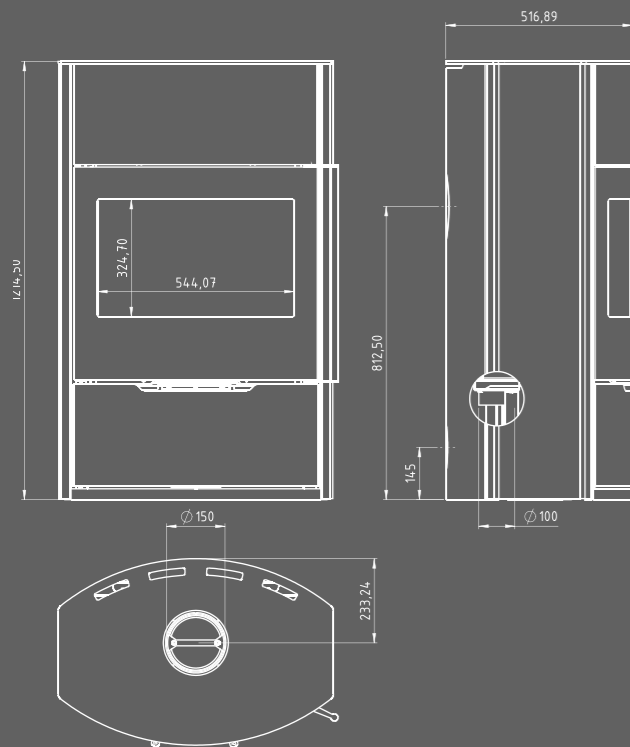

NOMINAL HEAT OUTPUT	7,6 kw
LIVING SPACE HEATING	145 m³
WEIGHT	193 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	10, 45, 127
EFFICIENCY	76%
FINE DUST	18 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	



Heat accumulator installation option (68 kg)

EMBER KAMIN

02



Also available in versions:



serpentino



limestone






EMBER KAMIN

M3 FG




One fireplace, so many possibilities.
Adjust the appearance of the fireplace to your wishes and needs by stacking the boxes according to your own preferences.

The steel box (timber storage) must be ordered additionally.

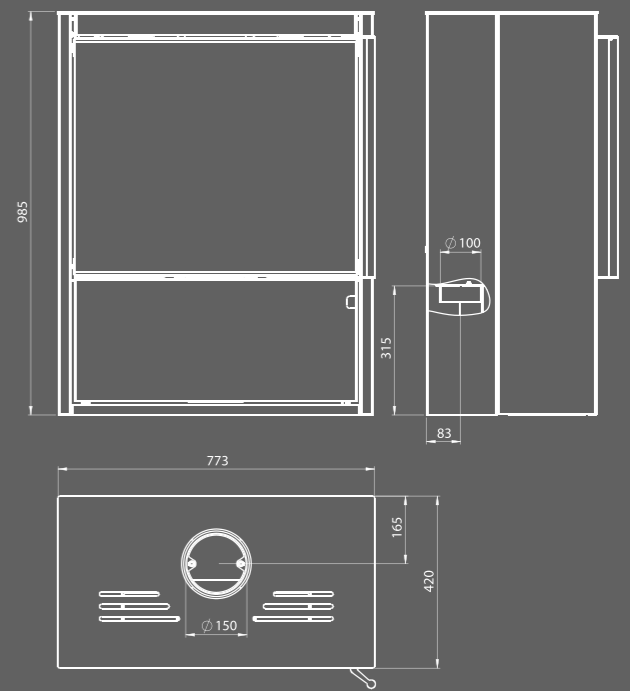

NOMINAL HEAT OUTPUT	8,1 kw
LIVING SPACE HEATING	145 m³
WEIGHT	181 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	25, 50, 150
EFFICIENCY	80%
FINE DUST	19 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A

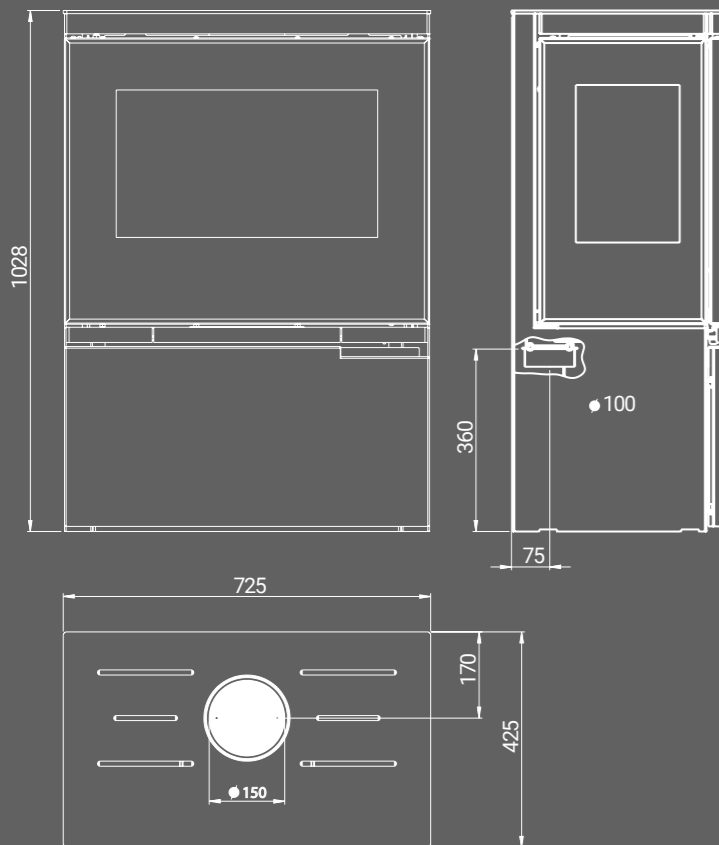

NOMINAL HEAT OUTPUT	8,5 kw
LIVING SPACE HEATING	145 m³
WEIGHT	190 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	20, 60, 140
EFFICIENCY	81%
FINE DUST	16 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	



EMBER KAMIN

M4 FG



Enjoy a clear view of the fire from every corner of your room
The sophisticated handle seamlessly integrates with the fireplace's design, ensuring it doesn't hinder the view of the fire





EMBER KAMIN

KITCHEN RANGE

Traditional cooking style

COOK

- DUAL FUNCTIONALITY - HEATING AND COOKING
 - FIRE-RESISTANT CONCRETE LINING WITHIN THE COMBUSTION CHAMBER
 - STEEL DOOR
 - TWO POINTS DOOR CLOSING SYSTEM
-

A1-80

- CRAFTED FROM HIGH-QUALITY MATERIALS AND ENAMELLED STEEL ON BOTH SIDES, WITH SELECT COMPONENTS IN STAINLESS STEEL
 - FIRE-RESISTANT CONCRETE LINING WITHIN THE COMBUSTION CHAMBER
 - OVERHEAT SAFETY PROTECTION FOR THE OVEN
 - ADJUSTABLE PRIMARY AND SECONDARY AIRFLOW FOR PRECISE CONTROL
-

A2 - 40

- CRAFTED FROM HIGH-QUALITY MATERIALS AND ENAMELLED STEEL ON BOTH SIDES, WITH SELECT COMPONENTS IN STAINLESS STEEL
- INTERIOR HEARTH LINED WITH NON-COMBUSTIBLE MATERIAL UP TO 1,250°C
- ADJUSTABLE PRIMARY AND SECONDARY AIRFLOW FOR PRECISE CONTROL




EMBER KAMIN
COOK




Dual functionality - for heating and cooking



See page 65 for more information.

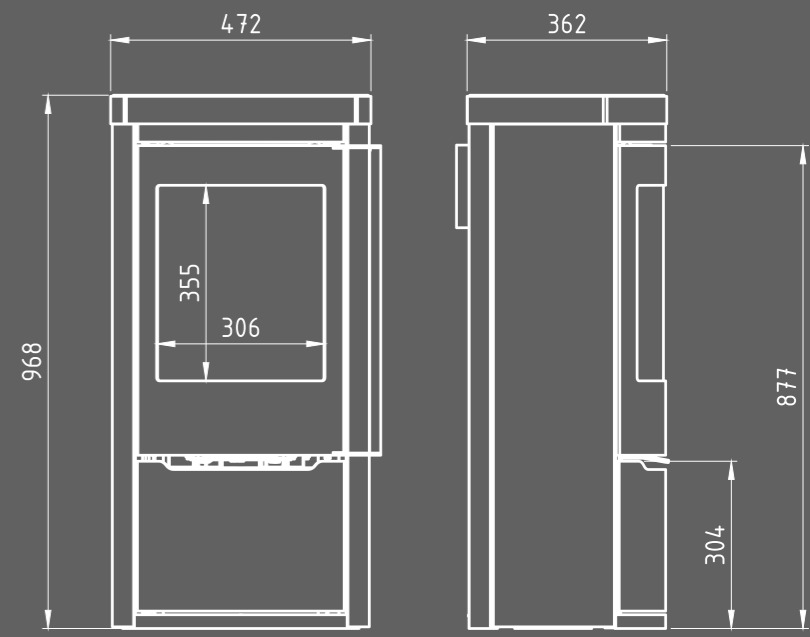

NOMINAL HEAT OUTPUT	5,5 kw
LIVING SPACE HEATING	125 m³
WEIGHT	75 kg
DISTANCE TO COMBUSTIBLE MATERIALS REAR / SIDE / FRONT (cm)	25, 35, 85
EFFICIENCY	85%
FINE DUST	17 mg/m³
FRESH AIR SUPPLY	100 Ø
FLUE PIPE CONNECTION (OUTLET)	150 Ø
ENERGY CLASS	A+

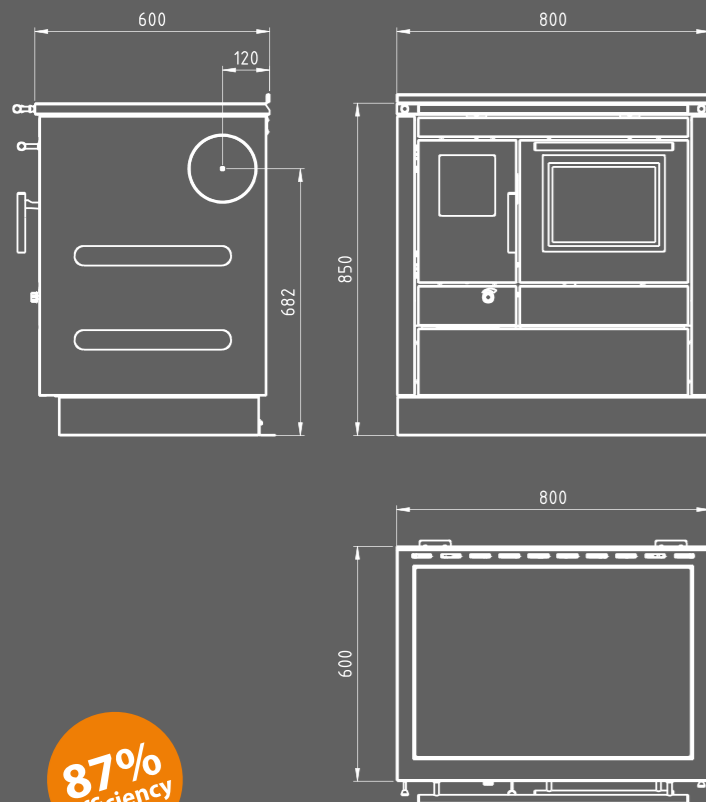

87%
Efficiency

MATERIAL	Sheet steel (enamelled), stainless steel, thermo-concrete
FUEL	Wood
HEARTH DIMENSIONS (W x L x H mm)	189 x 342 x 413
OVEN DIMENSIONS	425 x 330 x 260
FUME EXHAUST CONNECTION	120 Ø
WEIGHT	160 kg
TOTAL DIMENSIONS (W x L x H mm)	600 x 800 x 850
EFFICIENCY	87%



EMBER KAMIN

A1-80



See page 65 for more information.

A classic model that seamlessly complements contemporary kitchens.

For flavors reminiscent of childhood.



Steel plate

Ceran glass plate

This model is available in different colors.



ANTHRACITE

WHITE

STAINLESS BLACK





EMBER KAMIN

A2-40








For flavors reminiscent of childhood.



Steel plate



Ceran glass plate

	MATERIAL	Sheet steel (enamelled), stainless steel, thermo-concrete
	FUEL	Wood
	HEARTH DIMENSIONS (W x L x H mm)	192,5 x 302 x 282
	FUME EXHAUST CONNECTION	120 Ø
	WEIGHT	80 kg
	TOTAL DIMENSIONS (W x L x H mm)	600 x 400 x 850
	EFFICIENCY	76%
	ENERGY CLASS	



DESIGN IN DETAIL

Every Ember stove is one-of-a-kind. At Ember Kamin, our designers and technicians collaborate closely, harmonizing functionality and design. We meticulously attend to even the smallest details. Each Ember stove is handcrafted and undergoes rigorous quality control, guaranteeing precision and excellence.



ENVIRONMENT / SUSTAINABILITY

We hold our environmental responsibility in the highest regard. All of our stoves burn fuel nearly to completion, resulting in minimal soot emissions. Ember stoves consistently achieve emission levels well below legal standards. They are designed to maximize the utilization of heat energy, allowing you to create a warm and inviting atmosphere using renewable resources such as wood.





EFFICIENT COMBUSTION



Ember fireplaces are renowned for their highly economical consumption. Selecting the appropriate heating material enables efficient operation and, consequently, high efficiency levels.



Ember fireplaces are outfitted with an external air inlet, facilitating the intake of fresh combustion air from the outdoors via a duct. The key advantage of this approach is that it doesn't rely on indoor air to heat the room, resulting in energy savings. Consequently, stoves featuring this system are an ideal choice for use in contemporary, eco-conscious households.

FRESH AIR SUPPLY SAVES ENERGY

THREE DIFFERENT STOVE RANGES

suitable for every home

CLASSIC RANGE

Beauty in authenticity

- FIRE-RESISTANT CONCRETE LINING WITHIN THE COMBUSTION CHAMBER
- STEEL DOOR
- THREE POINTS DOOR CLOSING SYSTEM

MODERN RANGE

Supporting Your lifestyle

- SCREEN PRINTED GLASS DOOR
- FULL HEIGHT HANDLE
- FIRE-RESISTANT CONCRETE LINING WITHIN THE COMBUSTION CHAMBER
- 8mm THICK METAL TOP PLATE
- CAST IRON COLLAR FOR SMOKE EVACUATION

50 RANGE

Higher heating capacity

- STOVE FOR 50 CENTIMETER LOGS
- FULL HEIGHT HANDLE
- FIRE-RESISTANT CONCRETE LINING WITHIN THE COMBUSTION CHAMBER

EMBER KAMIN



E-BASIC

Nominal heat output	6,0 kW
Living space heating	125 m³
Weight	119 kg
Distance to combustible materials Rear / side / front (cm)	10, 10, 80
Efficiency	81%
Fine dust	26 mg/m³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	



E11

Nominal heat output	6,0 kW
Living space heating	125 m³
Weight	130 kg
Distance to combustible materials Rear / side / front (cm)	10, 10, 80
Efficiency	81%
Fine dust	26 mg/m³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	



E14

Nominal heat output	6,0 kW
Living space heating	125 m³
Weight	119 kg
Distance to combustible materials Rear / side / front (cm)	10, 10, 80
Efficiency	81%
Fine dust	26 mg/m³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	



E16

Nominal heat output	6,0 kW
Living space heating	125 m³
Weight	112 kg
Distance to combustible materials Rear / side / front (cm)	10, 10, 80
Efficiency	81%
Fine dust	26 mg/m³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

THE RIGHT MODEL FOR EVERY REQUIREMENT

EMBER KAMIN

EMBER KAMIN

**E11 FG**

Nominal heat output	6,0 kw
Living space heating	125 m ³
Weight	130 kg
Distance to combustible materials Rear / side / front (cm)	10, 10, 80
Efficiency	81%
Fine dust	26 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

**E14 FG**

Nominal heat output	6,0 kw
Living space heating	125 m ³
Weight	119 kg
Distance to combustible materials Rear / side / front (cm)	10, 10, 80
Efficiency	81%
Fine dust	26 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

**E16 FG**

Nominal heat output	6,0 kw
Living space heating	125 m ³
Weight	115 kg
Distance to combustible materials Rear / side / front (cm)	10, 10, 80
Efficiency	81%
Fine dust	26 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

**E15 FG**

Nominal heat output	6,0 kw
Living space heating	125 m ³
Weight	116 kg
Distance to combustible materials Rear / side / front (cm)	13, 70, 80
Efficiency	80%
Fine dust	23 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

**E15 XL FG**

Nominal heat output	6,0 kw
Living space heating	125 m ³
Weight	121 kg
Distance to combustible materials Rear / side / front (cm)	13, 70, 80
Efficiency	80%
Fine dust	23 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

**D19 FG**

Nominal heat output	7,0 kw
Living space heating	125 m ³
Weight	152 kg
Distance to combustible materials Rear / side / front (cm)	18, 42, 115
Efficiency	80%
Fine dust	22 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

**F11 FG**

Nominal heat output	7,0 kw
Living space heating	125 m ³
Weight	154 kg
Distance to combustible materials Rear / side / front (cm)	18, 52, 115
Efficiency	82%
Fine dust	26 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

**F14 FG**


Nominal heat output	7,0 kw
Living space heating	125 m ³
Weight	144 kg
Distance to combustible materials Rear / side / front (cm)	18, 42, 115
Efficiency	82%
Fine dust	26 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

THE RIGHT MODEL FOR EVERY REQUIREMENT


EMBER KAMIN

EMBER KAMIN


**F16 FG**

Nominal heat output	7,0 kw
Living space heating	125 m ³
Weight	146 kg
Distance to combustible materials Rear / side / front (cm)	18, 52, 115
Efficiency	82%
Fine dust	26 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	


**O1**

Nominal heat output	7,6 kw
Living space heating	145 m ³
Weight	172 kg
Distance to combustible materials Rear / side / front (cm)	10, 45, 127
Efficiency	76,0%
Fine dust	18 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	


**O1 XL**

Nominal heat output	7,6 kw
Living space heating	145 m ³
Weight	182 kg
Distance to combustible materials Rear / side / front (cm)	10, 45, 127
Efficiency	76%
Fine dust	18 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	


**O2**

Nominal heat output	7,6 kw
Living space heating	145 m ³
Weight	193 kg
Distance to combustible materials Rear / side / front (cm)	10, 45, 127
Efficiency	76%
Fine dust	18 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

**M3 FG**

Nominal heat output	8,1 kw
Living space heating	145 m ³
Weight	181 kg
Distance to combustible materials Rear / side / front (cm)	25, 50, 150
Efficiency	80%
Fine dust	19 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

**M4 FG**

Nominal heat output	8,5kw
Living space heating	145 m ³
Weight	190 kg
Distance to combustible materials Rear / side / front (cm)	20, 60, 140
Efficiency	81%
Fine dust	16 mg/m ³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	

KITCHEN RANGE

Traditional cooking style

COOK

- DUAL FUNCTIONALITY - HEATING AND COOKING
- FIRE-RESISTANT CONCRETE LINING WITHIN THE COMBUSTION CHAMBER
- STEEL DOOR
- TWO POINTS DOOR CLOSING SYSTEM

A1-80

- CRAFTED FROM HIGH-QUALITY MATERIALS AND ENAMELLED STEEL ON BOTH SIDES, WITH SELECT COMPONENTS IN STAINLESS STEEL
- FIRE-RESISTANT CONCRETE LINING WITHIN THE COMBUSTION CHAMBER OVERHEAT SAFETY PROTECTION FOR THE OVEN
- ADJUSTABLE PRIMARY AND SECONDARY AIRFLOW FOR PRECISE CONTROL

A2-40

- CRAFTED FROM HIGH-QUALITY MATERIALS AND ENAMELLED STEEL ON BOTH SIDES, WITH SELECT COMPONENTS IN STAINLESS STEEL
- INTERIOR HEARTH LINED WITH NON-COMBUSTIBLE MATERIAL UP TO 1,250°C
- ADJUSTABLE PRIMARY AND SECONDARY AIRFLOW FOR PRECISE CONTROL



Cook

Nominal heat output	5,5 kw
Living space heating	125 m³
Weight	75 kg
Distance to combustible materials Rear / side / front (cm)	25, 35, 85
Efficiency	85%
Fine dust	17 mg/m³
Fresh air supply	100 Ø
Flue pipe connection (outlet)	150 Ø
Energy class	



A1-80

Material	Sheet steel (enamelled), stainless steel, thermo-concrete
Full	Wood
Hearth dimensions (W x L x H mm)	189 x 342 x 413
Oven dimensions (mm)	425 x 330 x 260
Fume exhaust connection	120Ø
Weight (kg)	160 kg
Total dimensions (W x L x H mm)	600 x 800 x 850
Efficiency	87%
Energy class	




A2-40

Material	Sheet steel (enamelled), stainless steel, thermo-concrete
Full	Wood
Hearth dimensions (W x L x H mm)	192,5 x 302 x 282-
Fume exhaust connection	120Ø
Weight (kg)	80 kg
Total dimensions (W x L x H mm)	600 x 400x 850
Efficiency	76%
Energy class	



EMBER KAMIN

AUTHORISED DISTRIBUTOR:



Ember Kamin d.o.o.
Industrijska 7
34330 Velika
Croatia

info@ember.de
www.ember.de

